





Roca









Prior to fitting your bath, carefully remove all the packaging and film, examine the bath for damage and suitability of colour match.
 Check the product is complete with all fixings.
 Check the panel fit prior to installation.
 Check the bath rim is level before final fixing.

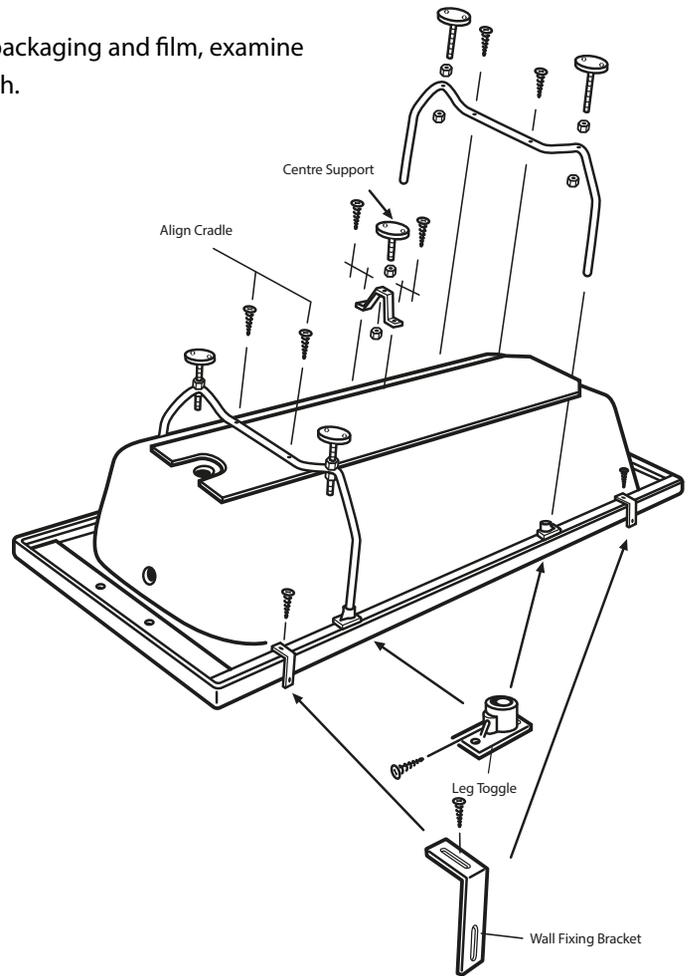

PARTS INCLUDED

<p>Pair of tubular cradles</p>  <p>x1</p>	<p>Cradle housing socket</p>  <p>x4</p>	<p>M10 Feet</p>  <p>x4</p>
<p>M8 Foot</p>  <p>x1</p>	<p>Centre foot bracket</p>  <p>x1</p>	<p>M10 Nuts</p>  <p>x8</p>
<p>M8 Nuts</p>  <p>x2</p>	<p>Wall brackets</p>  <p>x2</p>	<p>Transport screws/ Cradle securing screws (32mm)</p>  <p>x4</p>
<p>Fixing screws (23mm) To attach cradle sockets (If required see instruction 3)</p>  <p>x8</p>	<p>No.8 Domed self-tapping screws (16mm) To secure: - Centre foot bracket - Wall bracket - Cradle to socket</p>  <p>x8</p>	<p>We have taken great care to ensure that this product reaches you in perfect condition. However should any parts be damaged or missing please contact your point of purchase.</p>

TOOLS REQUIRED



* Ensure drill bit used is suitable for wall surface

METHOD OF ASSEMBLY

1. Remove all the packaging including the polyethylene film, which covers the entire bath.
2. Place the bath face down (using the pack to protect the bath) on a clean and level surface. Unscrew both tubular cradles from the bath frame. (keep the screws for instruction 4)
3. Attach the black toggles to the bath frame using 23mm fixing screws.
4. Align the cradle and hand screw directly into the baseboard using the 32mm screws from instruction 2. You must check the screw length before fitting.
5. Once the cradles have been secured into the baseboard of the bath secure them into the toggles with the self tapping screw provided. Then, secure the adjustable M10 feet to the cradles using M10 nuts provided.
6. Secure the adjustable centre support using screws and nuts provided to the centre of the baseboard.
7. With the bath in the upright position set top face level using threaded adjustment of feet and lock-nuts. When a panel is to be fitted, set the bath height to the height of the panel.
8. Check the bath rim is level.
9. Before the final fixing of the bath, fit the tap and waste fittings using a suitable sealing compound. When complete place the bath into position, re-check levels and make any final adjustments necessary. Finally secure the feet to the floor and wall brackets to the wall. Movement may occur if not fitted correctly.

CARE OF YOUR ROCA BATH

- ✓ Always run some cold water into the bath before turning on the hot tap.
- ✓ Clean immediately after use to stop the build up of dirt and limescale.
- ✓ Use warm soapy water to clean the bath and rinse down with cold water, wiping down with a soft dry cloth.
- ✓ The use of a cream cleaner can be used if there is a build up of limescale.
- ✓ Use T-cut and a soft cloth to fix minor surface marks.
- ✗ Do not use household chemicals or abrasive products such as hair dye, nail varnish remover, paint strippers, strong disinfectants, aftershave and household bleach.
- ✗ Do not have lit cigarettes or naked flames near acrylic as it can burn and melt.
- ✗ Some soap and shampoos can permanently discolour acrylic if allowed to pool undiluted for any length of time.

Roca Ltd.

Samson Road, Hermitage Industrial Estate, Coalville, Leicestershire, LE67 3FP

Telephone 01530 830080

www.uk.roca.com

Notice to installer

Please leave these instructions for the user to read.

