

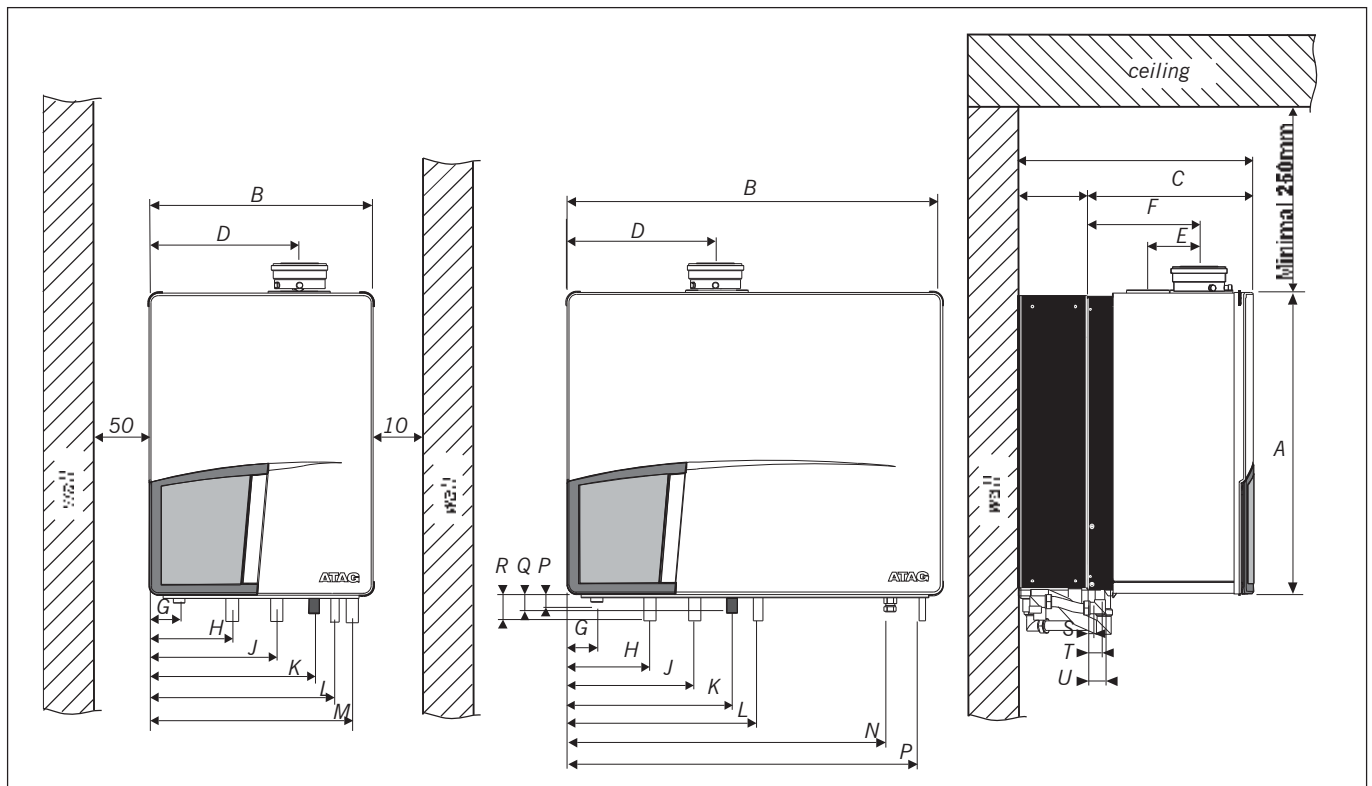


## Annex C Dimensions

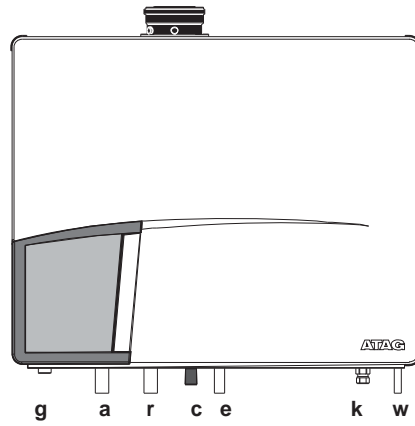

Boiler type			ATAG Q-Serie						
			Q25C	Q38C	Q51C	Q25S	Q38S	Q51S	Q60S
A	Height	mm	680	680	680	680	680	680	680
B	Width	mm	840	840	1000	500	500	660	660
C	Depth	mm	385	385	385	385	385	385	385
D	Left side / flue gas connexion	mm	335	335	495	335	335	495	495
E	Centre to centre flue gas and air supply	mm	120	120	120	120	120	120	120
F	Back / flue gas connexion	mm	270	270	270	270	270	270	270
G	Left side / gas pipe	mm	65	65	65	65	65	65	65
H	Left side / flow pipe	mm	185	185	185	185	185	185	185
J	Left side / return pipe	mm	285	285	445	285	285	445	445
K	Left side / condensate pipe	mm	370	370	530	370	370	530	530
L	Left side / expansion pipe	mm	430	430	590	430	430		
M	Left side / return pipe DHW				475	475			
N	Left side / cold water pipe	mm	725	725	885				
O	Left side / hot water pipe		765	795	955				
P	Pipe length of g*	mm	18	18	18	18	18	18	18
Q	Pipe length of c*	mm	40	40	40	40	40	40	40
R	Pipe length of a; r*	mm	60	60	60	60	60	60	60
S	Back / centre of pipe c*	mm	25	25	25	25	25	25	25
T	Back / centre of pipe g*	mm	40	40	40	40	40	40	40
U	Back / centre of pipe a and r*	mm	50	50	50	50	50	50	50

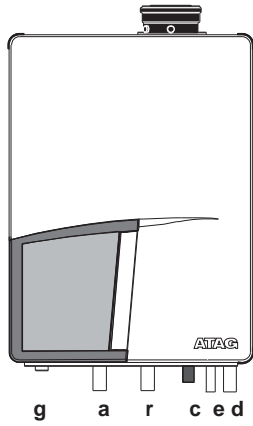

Boiler type		ATAG Q-Serie							
		Q25C	Q38C	Q51C	Q25S	Q38S	Q51S	Q60S	
	Concentric flue system	mm	80/125	80/125	80/125	80/125	80/125	80/125	optional
	Parallel flue system	mm	optional	optional	optional	optional	optional	optional	2x 80
g	Gas pipe		3/4"Rp	3/4"Rp	1/2"Rp	3/4"Rp	3/4"Rp	1/2"Rp	1/2"Rp
a	Flow pipe	mm	28	28	35	28	28	35	35
r	Return pipe	mm	28	28	35	28	28	35	35
c	Condensate pipe	mm	24	24	24	24	24	24	24
e	Expansion pipe	mm	22	22	22	22	22		
k	Cold water pipe	mm	15	15	15				
h	Hot water pipe	mm	15	15	15				
d	Return pip DHW	mm				28	28		