



Disc ERD bar valve shower with fixed head and diverter

Product code - A05033

The nabis range of showers contains a selection of contemporary styles to suit most tastes. nabis showers come with thermostatic temperature control which recognises fluctuations in water pressure and temperature when other taps in the home are being used, for added safety and comfort.



nabis



Features and benefits

- Thermostatic cartridge for safe temperature control with preset safety stop at 38°C. Can be over-ridden to a maximum of 43°C
- Dual control for separate control of flow and temperature
- Automatic shut-off in the event of cold or hot water supply failure
- 200mm diameter swivel overhead shower rose with easy clean rubber nozzles
- Diverter valve allows switching from overhead shower to separate handheld shower
- Supplied with single function shower handset with rub clean nozzles
- Push button slider bracket for shower handset height and angle adjustment
- 1.5m stainless steel double interlock shower hose

Performance					
System pressure (bar)	0.5	1	2	3	5
Overhead shower (mixed)	4.5	7.1	10.7	13.2	17.2
Handheld shower (mixed)	4.3	6.4	9.4	12	15.9

Flow rates (litres per minute)

Technical specification	
Temperature control	Thermostatic
On/off control	1/4 turn 3/4" ceramic disc valve
Working pressure range	Min. 0.5 bar, Max 5.0 bar
Maximum static pressure	10 bar
Hot water supply temperature range	Recommended 60 - 65°C
Cold water supply temperature range	Recommended 10 - 15°C
Plumbing system compatibility	All, preferably balanced
Inlet connections	15mm compression with 150mm inlet centres
Outlet connection	G 1/2"
Shower valve main construction material	Brass
Finish/Colour	Chrome

wolseley.co.uk


The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of products and so reserve the right to change specifications without prior notice.

Version number 1.0



The Specialist Merchant

Dimensions (mm)

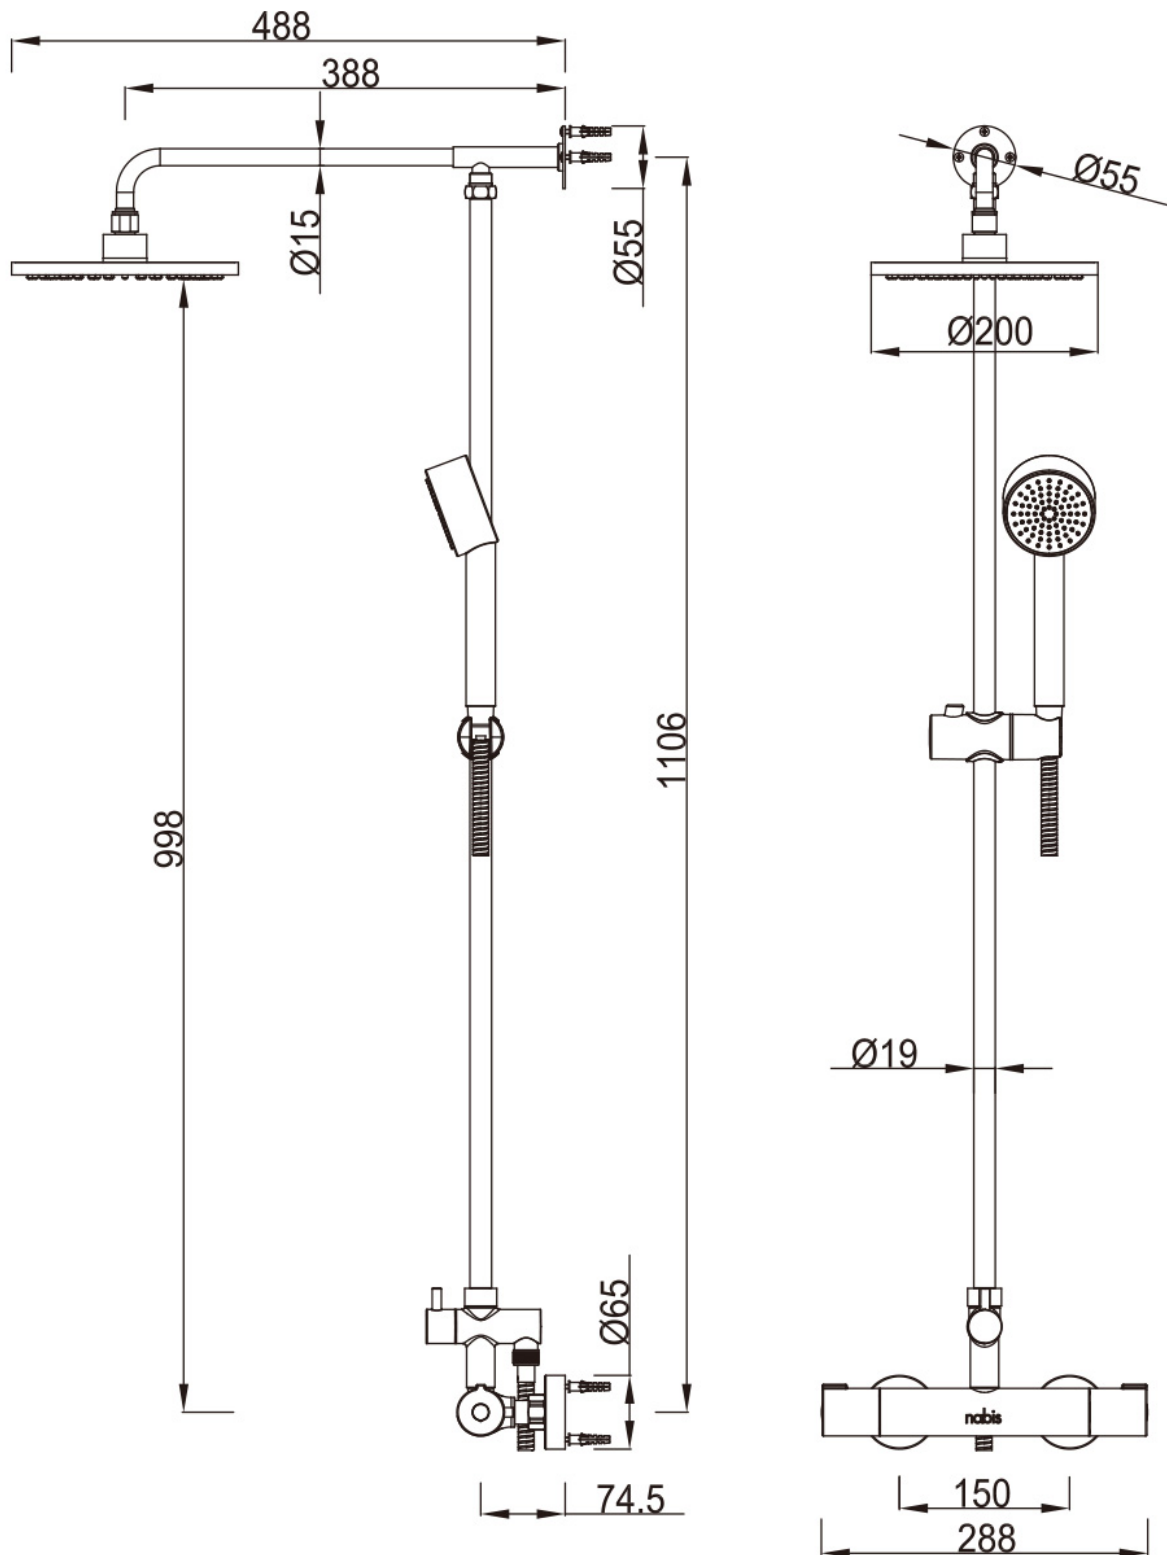

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of products and so reserve the right to change specifications without prior notice.

Version number 1.0

